


Lubricant GM-95

Shortly before installing the segments with the vacuum erector, the sealing frames on the longitudinal joint sides must be lubricated with a suitable lubricant to reduce the surface friction forces. This applies in particular to the so-called "keystone". Cordes **GM-95** is an ideal product for this application.

Benefits

- **GM-95** is an environmentally friendly, biodegradable product
- **GM-95** does not attack the seals
- **GM-95** / MPA - tested quality
- **GM-95** is available in bucket sizes of 3 kg and 6 kg and is therefore suitable for carrying along in the confined and not always easily accessible areas of the tunnel boring machine
- The application is done by hand or with a brush, no other aids are necessary

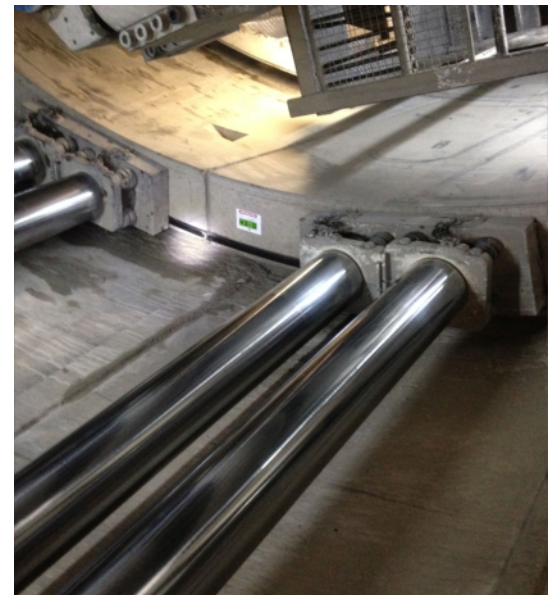

Contents such as technical specifications, values, and dimensions are given to the best of our knowledge, however, without any guarantee and liability. If not specified otherwise, dimensions are given in millimetres. Our General Terms and Conditions shall apply.